
	<b>Construction Plant-hire Association</b> Tower Crane Interest Group					
<b>TIN 006</b>	<b>Tower Crane Access Ladders</b>					
<p>Access ladders should be installed in accordance with the crane manufacturer's instructions and care should be taken to ensure that the pitch of the ladder treads is maintained at junctions between sections. Particular problems may occur where transition sections are used between towers of different width, or on access ladders to the jibs of luffing cranes (see Figure 1). Any variations in rung pitch due to the design of the ladders should be taken up with the crane manufacturer.</p> <p>All access ladders should be regularly maintained to ensure that they are securely fixed, clean and kept free of obstructions. Ladders should never be used as supports for items such as cables and hoses (see Figure 2).</p> <p>Access ladders within the tower are generally inclined or vertical, with short runs of ladder between rest platforms spaced at intervals up the tower, thus limiting the potential distance a person can fall. A small number of older cranes are fitted with one vertical ladder extending the full height of the tower, with rest platforms to one side of the ladder (see Figure 3). In this case, where a person can fall more than 6m, additional means of fall protection, such as the Spanset ERGO vertical safety line, or inertia reel lanyard, used with a suitable fall arrest harness, must be provided.</p> <p><b>Ladder Positioning and Hoops Guards</b></p> <p>Ladders which are intended to be used without personal protective equipment against falls from a height should have rest platforms at least every 6 m and where there is a risk of falling greater than 5 m, be equipped with a hoop guard or an alternative means of protection.</p> <p>The alternative to a hoop-guard is where the ladder is located inside a structure such that the structural members provide equivalent protection. This equivalent protection is achieved when the two following conditions are fulfilled:</p> <ol style="list-style-type: none"> <li>a) a sphere of 0,6 m diameter cannot pass horizontally through the vertical structure;</li> <li>b) the free space inside the structure is equivalent to that given by the hoop guard, see the examples given in Figure 4.</li> </ol> <p>The hoops of a hoop guard should be connected by three or five longitudinal bars spaced equally around the hoop. In all cases, a bar shall be fixed in a position diametrically opposite to the centre line of the ladder.</p> <p>Flights of ladders should be positioned or other means provided, to prevent persons falling more than 6 m.</p>						
<i>TIN No.</i>	006	<i>Issue Date</i>	30.07.07	<i>Issue</i>	B	Page 1 of 2




Figure 1 - Uneven Rung Pitch



Figure 2 – Cables Attached to Ladder



Figure 3 – Single Vertical Ladder

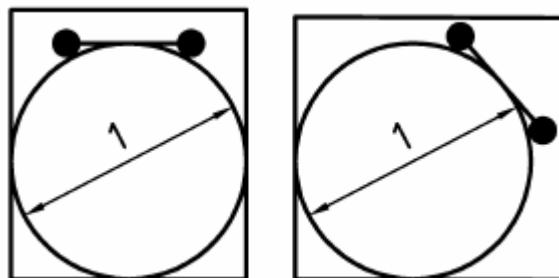

**Key** 1 Inside diameter = hoop dimension

Figure 4 – Free Space Inside Structure